



**INSPECTION REPORT (PSI)**

Report No.: H-0504007

CLIENT NAME : Consumer Electronics Trade GmbH  
 P.O NO. : WE050224  
 SUPPLIER : ZHE JIANG  
 FACTORY : YONG  
 MODEL / ART / STYLE NO. : C-003AP  
 PRODUCT DESCRIPTION : JUICER AND ITS SOME OTHER ACCESSORIES  
 P.O. QUANTITY : 300XJUICER + 100X “PART 1” + 100X “PART 2”  
 SHIPMENT QUANTITY : 300 + 200 PIECES  
 INSPECTION DATE : APR 2, 2005  
 INSPECTION LOCATION : YONG, CHINA

**QUANTITY AVAILABLE**

|                | Lot Quantity | Quantity Available |                     |                       | Sampling Size From |                     |
|----------------|--------------|--------------------|---------------------|-----------------------|--------------------|---------------------|
|                |              | Packed Quantity    | Not Packed Quantity | Not Finished Quantity | Packed Quantity    | Not Packed Quantity |
| No. of pieces  | 300+200      | 300+200            | -                   | -                     | 50                 | -                   |
| No. of cartons | 157          | 157                | N/A                 | N/A                   | 25                 | N/A                 |

**FINDINGS**

| Inspection Standard: MIL-STD-105E              | AQL                           | Accepted | Total Found |
|--|-------------------------------|----------|-------------|
| Sampling Plan : Single, Normal                 | <b>Critical : Not Allowed</b> | 0        | 0           |
| Inspection Level : General Inspection Level II | <b>Major : 1.5</b>            | 2        | 0           |
| Sample Size : 50 pieces                        | <b>Minor : 4.0</b>            | 5        | 1           |

**RESULT**

Quantity : Conformed.  
 Product Description/Style/Color : Please refer to Special Attention point 1.  
 Workmanship : Conformed.  
 Data Measurement : Please refer to Special Attention point 2.  
 Form of Packaging : No requirement given.  
 Shipping Mark : No requirement given.

**OVERALL CONCLUSION : PENDING DUE TO SPECIAL ATTENTION POINTS 1 AND 2.**

\*\*\*\*\*

This reflects our findings at the time and place in inspection. This inspection has been carried out to the best of our knowledge and ability and our responsibility is limited to the exercise of reasonable one. This report does not relieve the sellers from their contractual obligations nor prejudice buyer's right for compensation for any apparent and / or hidden defects not detected during our random inspection or occurring thereafter.  
 This report does not evidence shipment.



**WORKMANSHIP**

| Defects Description      | Cr | Ma | Mi |
|--------------------------|----|----|----|
| Poor printing on housing | -  | -  | 1  |
|                          |    |    |    |
| Total Found:             | 0  | 0  | 1  |
| Allowed:                 | 0  | 2  | 5  |

**SPECIAL ATTENTION**

- 1) The factory could not provide “lifetime guarantee of motor” which was stated on gift box.
- 2) The factory could not provide equipment for noise level check
- 3) The factory could not provide GS/CE certification.

**The inspection details were found as follows :**

**1) PRODUCT DESCRIPTION, STYLE AND COLOUR:**

1.1 Check against PO.:

- No PO was provided.

1.2 Check against sample:

- No submitted sample was provided by applicant or Vendor for style & colour comparison.

1.3 Check against Instruction Manual:

- The functionality description in English on the instruction manual is adopted on the actual unit.

1.4 Check against gift box

- Discrepancy was found, please refer to Special Attention point 1.

\*\*\*\*\*

**2) DATA MEASUREMENT:**

- Hi voltage on accessible part (At 4300 V. for ( 50 Samples ) : No breakdown.  
1 sec)
- Hi voltage on Earthed Part (At 1500 V. for 1 ( 50 Samples ) : No breakdown.  
sec)
- Earth resistance check (15-25amp, <0.1Ω) ( 50 Samples ) : Satisfactory.
- Internal check for workmanship ( 5 Samples ) : Satisfactory.
- Transportation Drop Test ( 1 Carton ) : Satisfactory.
- Power on Check for 4 hours ( 2 Samples ) : Satisfactory.
- Rub and Tape Test on Logo ( 2 Samples ) : Satisfactory.
- Dimension of Carton (LxWxHem) ( 2 Cartons ) : Actual: 56.5x43.5x46.5cm,  
56.5x43.5x46cm
- Weight of Carton ( 2 Cartons ) : Satisfactory.  
(Spec.: on export carton: 16 kg) Actual: 16, 16 (kg)
- Smell test ( 5 Samples ) : Satisfactory.
- Volume check for measuring cup ( 5 Samples ) : Actual: refer to Note 3.
- Cord length ( 2 Samples ) : Actual: 1.46, 1.46 (m)
- Noise level check ( 5 Samples ) : Refer to Note 2.
- Function check ( 50 Samples ) : Satisfactory.
- Quantity check ( 1 Carton ) : Satisfactory.
- CE Mark Location: On rating label
- Power Consumption without load at 220 V 50 ( 50 Samples ) :  
Hz.

| Setting   | Reading (range) | Requirement |
|---|-----------------|-------------|
|   | 109-128W        |             |
| Data marked with '*' was/were found out of specification. |                 |             |

- Barcode Readability Check ( 5 Samples ) : Satisfactory.

| Item No.   | Barcode No.  | Location | Barcode No. | Location |
|--|--------------|----------|-------------|----------|
|  | 752356782580 | B        |             |          |
| *Location code: A-Export Carton; B-Gift Box; C-Blister Card; D-Unit; E-Hangtag; F-Inner White Box; G-Other |              |          |             |          |

\*\*\*\*\*

This reflects our findings at the time and place in inspection. This inspection has been carried out to the best of our knowledge and ability and our responsibility is limited to the exercise of reasonable one. This report does not relieve the sellers from their contractual obligations nor prejudice buyer's right for compensation for any apparent and / or hidden defects not detected during our random inspection or occurring thereafter.

This report does not evidence shipment.

**3) PACKAGING:**

**Unit Packing:**


- Merchandise consisted of a juicer, a juicer platform, a overflow platform, a grate, a measuring cup, a blade remover, a pusher, a brush, a pulb collector, 2 appendix manual, 1 instruction manual and an “accessory kit” sheet.
- Each overflow platform and grate were put into a bubble bag; Each measuring cup was put into a polybag printed with warning clause and “PE-LD-04” recycle mark; Each blade remover, pusher, brush and pulb collector were put into a polybag; Each base was put into a polybag; Each juicer put into a perforated polybag printed with warning clause then all of them were protected by polyfoam and with other manual were packed into a gift box.

**Export Carton Packing:**


- Two (2) gift boxes were packed into a 5 -ply corrugated export carton, and sealed with gummed tapes.

**4) SHIPPING MARK:**

Main mark (2 Sides)

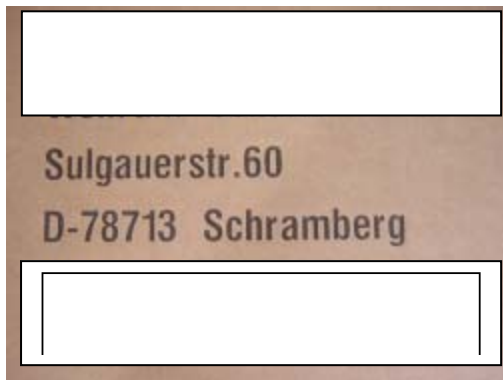

Side mark (2 Sides)

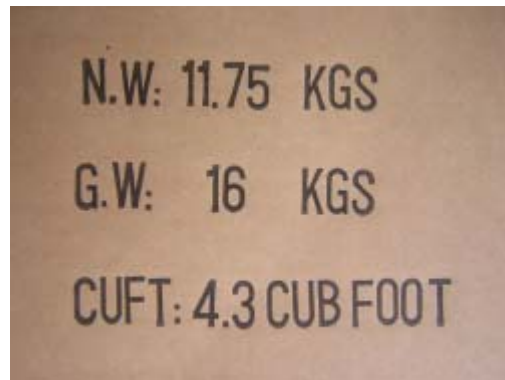

\*\*\*\*\*

**5) CRITICAL COMPONENT CHECK:**

| Component description                                     | Actual marking on component                             | Does the Marking comply with certificate? |
|---|---|---|
| Item:   |   |   |
| 1. Plug   | Yun huan Y003 10/16A 250V VDE                           | Yes                                       |
| 2. Cord   | Jingyi H03VV-F 3G 0.5mm <sup>2</sup> VDE CQCUL          | Yes                                       |
| 3. Capacitor  | CBB61 3uF+/-5% 450VAC 50/60HZ VDE                       | Yes                                       |
| 4. Interlock switch                                       | ZIPPY V3-10 10.1A 1/2HP 10(4)A/250V~ T100<br>VDE (S) UL | Yes                                       |
| 5. Switch   | ZHONG XUN 10A/250VAC 15A/125 VAC<br>10A/250V~ T85 CQC   | Yes                                       |
| 6. Motor  | No marking  | Yes /No /Nil                              |
| *Note: "Nil" --No any certificate was provided by factory |   |   |

**NOTE**

- Carton no. was not assigned yet.
- Photos have been taken
- Manufacturer did not agree with us to draw one production sample to HQTS office for reference.
- Manufacturer did not agree with us to draw defective sample to HQTS office for reference.

Note:

- 1) For this inspection, 50 pieces juice were inspected from 300 pieces juice.
- 2) For power on check, unit was 6 min or then 3 min off cyclically for 4 hours.
- 3) Volume check for measuring cup (5 samples):

|   | <u>Volume level on cup (cc)</u> | <u>Actual (cc)</u> |
|---|---------------------------------|--------------------|
| A | 1,000                           | 885                |
| B | 750                             | 650                |
| C | 500                             | 430                |
| D | 250                             | 200                |

\*\*\*\*\*

**PHOTO ATTACHMENT**

|   |  |
|---|--|
|    |    |
| <p align="center"><b>(part2)export carton</b></p>                                   | <p align="center"><b>export carton</b></p>   |
|   |   |
| <p align="center"><b>marking on part1 export carton</b></p>                         | <p align="center"><b>side mark</b></p>   |
|  |  |
| <p align="center"><b>front mark</b></p>   | <p align="center"><b>gift box</b></p>  |

\*\*\*\*\*

**PHOTO ATTACHMENT**



\*\*\*\*\*

**PHOTO ATTACHMENT**

|  |   |
|--|---|
|  <p><b>Fast, Healthy, Fresh Juice in Seconds!</b></p> <ul style="list-style-type: none"> <li>• Special Patented Extraction Technology</li> <li>• Extra-Large Feeder</li> <li>• Super-Sized Detachable Pulp Collector</li> <li>• Dishwasher Safe</li> <li>• Whisper-Quiet Operation</li> <li>• 3,600 RPM Motor Has Lifetime Guarantee</li> <li>• Built-In Safety Features</li> <li>• Surgical-Quality Stainless Steel Blade</li> <li>• Commercial Quality</li> </ul> |  <p><b>Start Power Juicing for Energy and Good Health!</b></p> <p><b>Juicing Helps:</b></p> <ul style="list-style-type: none"> <li>• Digest the Daily</li> <li>• Prevent Disease</li> <li>• Lower Cholesterol</li> <li>• Weight Loss</li> <li>• Energy Levels</li> <li>• Overall Good Health</li> </ul> <p><b>The Ultimate Juicing Machine Features:</b></p> <ul style="list-style-type: none"> <li>• Special Patented Extraction Technology gives you up to 30% more juice than other juicers.</li> <li>• Extra Large Feeder lets you put most fruits and vegetables in whole. There is only one feeding device, pushing or chopping.</li> <li>• Super-Sized Detachable Pulp Collector for consistent, healthy juices, jellies, broths, soups and more.</li> <li>• Dishwasher Safe for easy clean up.</li> <li>• Whisper-Quiet Operation</li> <li>• 3,600 RPM Motor comes with a lifetime warranty.</li> <li>• Built-In Safety Features that will not allow you to operate unless properly assembled.</li> <li>• Surgical-Quality Stainless Steel Blade</li> <li>• Commercial Quality</li> </ul> |
| <p><b>printing1 on giftbox</b></p>   | <p><b>printing2 on giftbox</b></p>  |
|    |    |
| <p><b>(part1)packing method in export carton( the first kind)</b></p>  | <p><b>(part2)packing method in export carton1</b></p>   |
|   |   |
| <p><b>(part2)packing method in export carton2</b></p>  | <p><b>gift box packing</b></p>  |

\*\*\*\*\*

**PHOTO ATTACHMENT**

|   |  |
|---|--|
|    |    |
| <p><b>(part1)filter, overflow platform and grate1</b></p>                           | <p><b>(part2)juice platform and brush1</b></p>                                       |
|   |   |
| <p><b>(part1)cup and blade1</b></p>   | <p><b>(part1)blade</b></p>   |
|  |  |
| <p><b>(part1)cup and blade2</b></p>   | <p><b>(part1)cup and blade2</b></p>  |

\*\*\*\*\*

**PHOTO ATTACHMENT**

|  |  |
|--|--|
|  |  |
| <p><b>(part1)filter,overflow platform and grate2</b></p> | <p><b>(part2)juice platform and brush2</b></p> |
|  |  |
| <p><b>accessory kit sheet</b></p>                        | <p><b>appendix manual1</b></p>                 |
|  |  |
| <p><b>appendix manual2</b></p>                           | <p><b>back of unit</b></p>                     |

\*\*\*\*\*

**PHOTO ATTACHMENT**



\*\*\*\*\*

This reflects our findings at the time and place in inspection. This inspection has been carried out to the best of our knowledge and ability and our responsibility is limited to the exercise of reasonable one. This report does not relieve the sellers from their contractual obligations nor prejudice buyer's right for compensation for any apparent and / or hidden defects not detected during our random inspection or occurring thereafter.  
This report does not evidence shipment.

**PHOTO ATTACHMENT**

|   |  |
|---|--|
|    |    |
| <p><b>overflow platform and grate</b></p>   | <p><b>plug</b></p>   |
|   |   |
| <p><b>switch</b></p>  | <p><b>unit and accessories</b></p>   |
|  |  |
| <p><b>unit assembled</b></p>  | <p><b>unit</b></p>   |

\*\*\*\*\*

**PHOTO ATTACHMENT**

|   |  |
|---|--|
|    |    |
| <p><b>practicability check1</b></p>   | <p><b>practicability check2</b></p>  |
|   |   |
| <p><b>internal check</b></p>  | <p><b>barcode on gift box</b></p>  |
|  |  |
| <p><b>label1 on unit</b></p>  | <p><b>marking on cup</b></p>   |

\*\*\*\*\*

**PHOTO ATTACHMENT**

|   |                                   |
|---|-----------------------------------|
|   |                                   |
| <p><b>marking on interlock switch</b></p> | <p><b>marking on plug</b></p>     |
|   |                                   |
| <p><b>marking on switch1</b></p>          | <p><b>marking on switch2</b></p>  |
|   |                                   |
| <p><b>printing on capacitor</b></p>       | <p><b>printing on housing</b></p> |

\*\*\*\*\*

**PHOTO ATTACHMENT**

|   |                            |
|---|----------------------------|
|   |                            |
| <p><b>printing on polybag</b></p>             | <p><b>rating label</b></p> |
|   |                            |
| <p><b>defect-poor printing on housing</b></p> |                            |

\*\*\*\*\*

ATTACHMENT

|   |  |  |  |
|---|--|--|--|
| Name und Sitz des Zeichengenehmigungsinhabers / Name and registered seat of the Marks Licensee holder   |  | Datum / Date   |  |
| Ningbo Xunhuan Electronics Group Corporation<br>318472 SIMEN TOWN YUYAO CITY ZHEJIANG, P. R. China  |  | 1999-08-01   |  |
| Altkennzeichen / File ref.  |  | letzte Änderung / updated  |  |
| 17193-1560-0003 / 30LDW F33 / E   |  | 1997-08-12   |  |
| Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Zeichengenehmigungsausweises Nr. 103225.<br>This supplement is only valid in conjunction with page 1 of the Marks Licence No. 103225. |  |  |  |
| Stecker nicht wiederanschließbar<br>Plug non-rewirable  |  | 1,00   |  |
| Typ(en) / Type(s):  |  |  |  |
| Y003  |  | 1,00   |  |
| Bemessungsspannung<br>Rated voltage   | UC 250 V AC 250 V  |  |  |
| Bemessungsstrom<br>Rated current  | 10 A 16 A  |  |  |
| Polzahl<br>Number of poles  | zweipolig mit zwei Schutzkontaktsystemen<br>two poles with dual earthing contact system  | 1,00   |  |
| Bauart<br>Type of construction  | DIN 49 441 R2  |  |  |
| Schutzart<br>Degree of protection   | abgedeckt<br>covered   |  |  |
| Zuleitung(en)<br>Cord(s)  | H03VV-F 3G 0,75 mm <sup>2</sup><br>H05VV-F 3G 0,75 mm <sup>2</sup><br>H05VV-F 3G 1,0 mm <sup>2</sup><br>H05VV-F 3G 1,5 mm <sup>2</sup><br>H05RR-F 3G 0,75 mm <sup>2</sup><br>H05RR-F 3G 1,0 mm <sup>2</sup><br>H05RN-F 3G 0,75 mm <sup>2</sup><br>H05RN-F 3G 1,0 mm <sup>2</sup><br>H07RN-F 3 G 1,5 mm <sup>2</sup><br>H03RT-F 3G 0,75 mm <sup>2</sup><br>H03RT-F 3G 1,0 mm <sup>2</sup> | 0,20<br>0,20<br>0,20<br>0,20<br>0,93<br>0,93<br>0,20<br>0,20<br>0,20<br>0,20<br>0,20 |  |
| Ausführung(en)<br>Construction(s)   | abgewinkelte Leitungseinführung<br>angled cable entry  |  |  |
| Fortsetzung siehe Blatt 3 / continued on page 3   |  |  |  |

VDE Testing and Certification Institute Institut VDE d'Essais et de Certification

Merianstraße 25, D 43099 Offenbach

Telephone (+49) (69) 2906-0  
Telefax (+49) (69) 2906-555



117

\*\*\*\*\*

ATTACHMENT

cord

**VDE Prüf- und Zertifizierungsinstitut**  
**Zeichengenehmigung**

Lizenz-Nr.  
133957

Name und Sitz des Genehmigungsnehmers / Name and registered office of the licensee

Yuyao Jingyi Electronics Co. Ltd  
Hubei Ximen Town  
315472 YUYAO, ZHEJIANG, P. R. China  
24730-5440-0005 / 32KUG F42 / STR

Werte Änderung / Wertung

2001-05-05

Datum / Date

2001-04-24

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Zeichengenehmigungsausweises Nr. 133957.  
This supplement is only valid in conjunction with page 1 of the Licence No. 133957.

Flexible Leitungen  
Flexible cables and cords

Typ(en) / Type(s):

- H03VV-F 2 X 0,5...0,75 mm<sup>2</sup>
- H03VV-F 3 G 0,5...0,75 mm<sup>2</sup>
- H03VVH2-F 2 X 0,5...0,75 mm<sup>2</sup>
- H05VV-F 2 X 0,75...1,5 mm<sup>2</sup>
- H05VV-F 3 G 0,75...1,5 mm<sup>2</sup>
- H05VVH2-F 2 X 0,75...1,0 mm<sup>2</sup>

Firmenzeichen  
Trademark

Jingyi Electronics

Dieser Zeichengenehmigungs-Ausweis bildet die Grundlage für die EG-Konformitätserklärung und CE-Kennzeichnung durch den Hersteller oder dessen Bevollmächtigten und bescheinigt die Konformität mit den genannten Normen im Sinne der EG-Niederspannungsrichtlinie 73/23/EWG mit ihren Änderungen.

This Marks Licence is the basis for the EC Declaration of Conformity and the CE Marking by the manufacturer or his agent and shows the conformity with the said standards as defined by the EC Low-Voltage Directive 73/23/EEC including amendments.

VDE Prüf- und Zertifizierungsinstitut  
VDE Testing and Certification Institute  
Fachgebiet F42  
Section F42

*[Handwritten Signature]*

10



ATTACHMENT

**VDE Prüf- und Zertifizierungsinstitut  
Zeichengenehmigung**

Ausweis-Nr. / Blatt /  
Licence No. / page  
40001530 2

Name und Sitz des Genehmigungs-Inhabers / Name and registered seat of the Licence holder  
Zhuji Capacitor Factory, Chencaizhen Zhuji, ZHEJIANG PROVINCE, CHINA

Aktenzeichen / File ref.  
2512800-4630-0001 / 12498 / F350 / BT

Datum / Date  
2002-05-17

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Zeichengenehmigungsausweises Nr. 40001530.  
*This supplement is only valid in conjunction with page 1 of the Licence No. 40001530.*

*Capacitor*

**Motor-Betriebskondensator  
Motor running capacitor**

Jahresgebühren-Einheiten /  
Annual fee units

15.81

Typ(en) / Type(s):

Bemessungskapazität  
Rated capacitance

$\mu\text{F} \pm 5\%$

CBB61

0,5

30.02

0,6

0,82

1

1,2

1,5

2

2,5

3

3,5

4

4,5

5

6

8

10

12

15

18

20

Bemessungsspannung  
Rated voltage

a) AC 500 V (0,5  $\mu\text{F}$  bis/to 8  $\mu\text{F}$ )

b) AC 450 V (10  $\mu\text{F}$  bis/to 20  $\mu\text{F}$ )

Betriebsart  
Type of operation

DB

Bemessungsfrequenz  
Rated frequency

50/60 Hz

Klimaklasse  
Climatic category

40/070/21

Sicherheitsklasse  
Class of safety protection

PO

12

Fortsetzung siehe Blatt 3 /  
continued on page 3

VDE Testing and Certification Institute \* Institut VDE d'Essais et de Certification

Merianstrasse 26, D-63069 Offenbach




Telefon +49 (0) 69 83 06-0  
Telefax +49 (0) 69 83 06-555

\*\*\*\*\*

ATTACHMENT

*Motor*

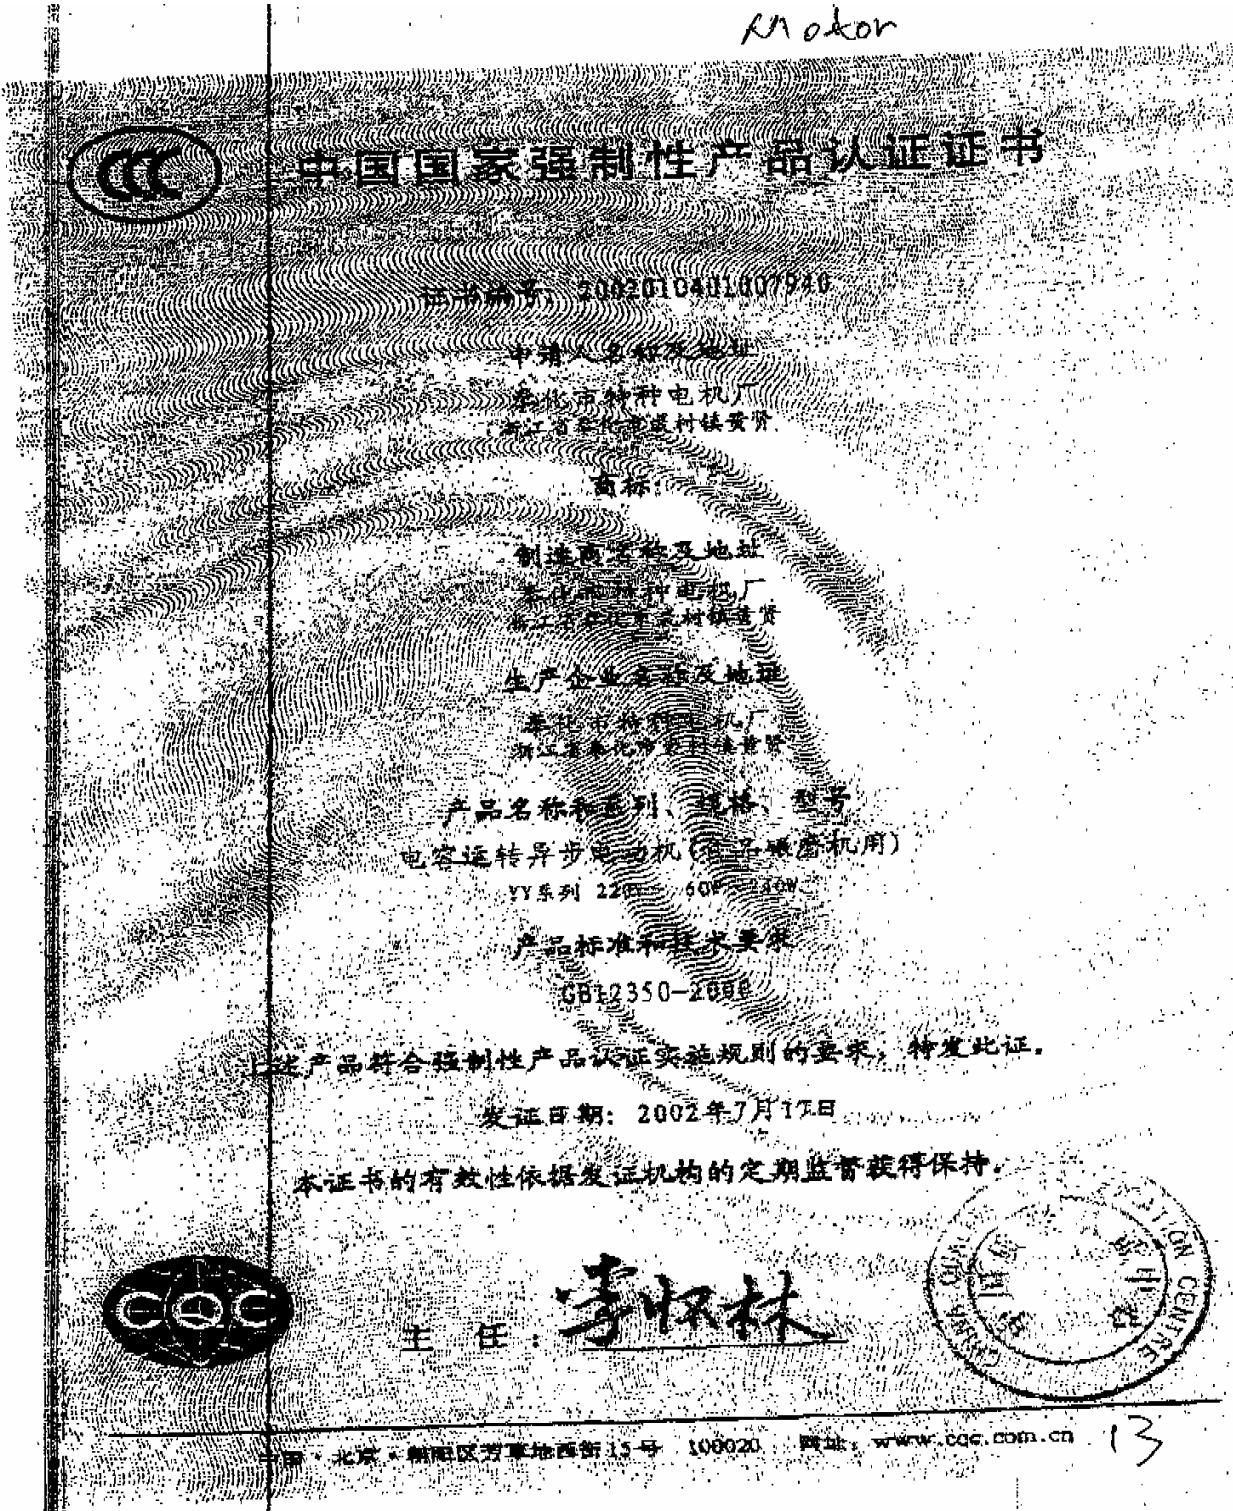

\*\*\*\*\* FAX NO. : Apr. 02 2005 18:27 P1 \*\*\*\*\*

01/18/2001 04:22 057488789709 FENSHUATEZHONGDIANJI

PAGE 01

ATTACHMENT

Switch



# PRODUCT CERTIFICATE

Number: CQC03002004577

Applicant: **SHANGHAI ELECTRONICS CO., LTD.**

Trade Mark: ZX

Model/Name: KCD3 15A/30A 250VAC 10A 250VAC  
ROCKER SWITCH

Standard: GB15092.1-2000

Factory: **SHANGHAI ELECTRONICS CO., LTD.**

Address:

Factory Code: V000706

Types of product certification system: The 5<sup>th</sup> Certification System

President:

*李怀林*



**CHINA QUALITY CERTIFICATION CENTRE**

No. 15 Fangcaodixijie, Chaoyang District, Beijing 100020, P.R.China

<http://www.cqc.com.cn>

A 0010436

\*\*\*\*\*